




Connect for Life™

Cable Assembly for Finisar® BOA

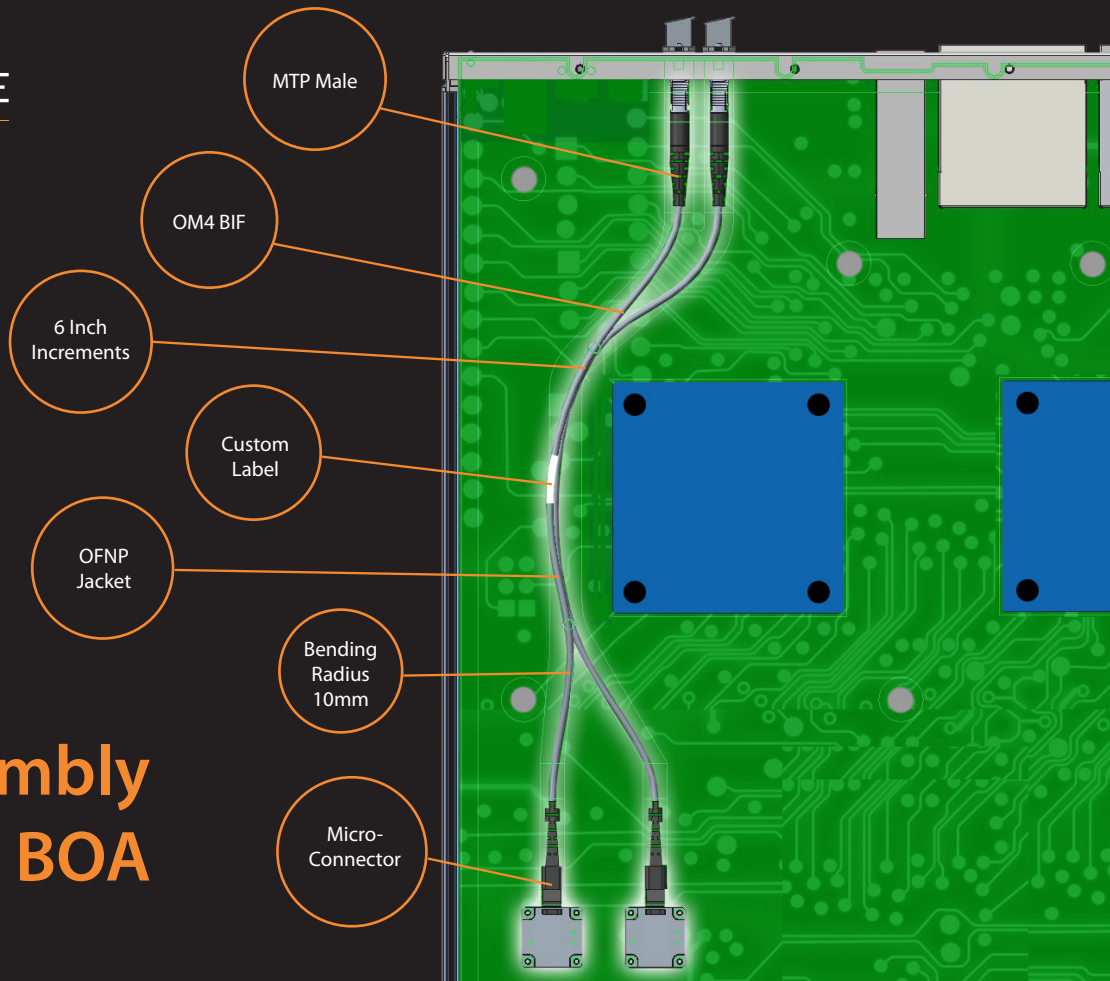

MTP Male

OM4 BIF

6 Inch
Increments


Custom
Label

OFNP
Jacket


Bending
Radius
10mm

Micro-
Connector


Finisar® 10G BOA




12 TxRx




Finisar® 10G BOA




12 Tx




12 Rx

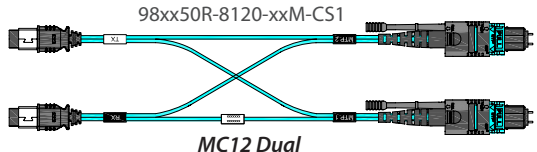

Finisar® 25G BOA




24 TxRx




Finisar® 25G BOA



24 Tx



24 Rx

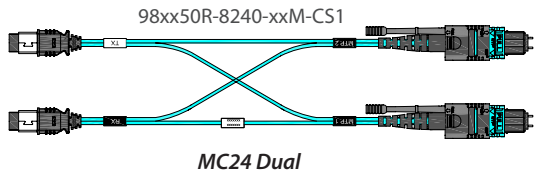

Optical Specifications (850 & 1300 nm)		
Insertion Loss	Typical	0.10 (dB)
	Max	0.35 (dB)
Return Loss	Max	-20 (dB)

Mechanical Specifications	
Max. Tensile Strengths, Short Term	
12F:	150N 24F: 210N
Max. Tensile Strengths, Long Term	
12F:	80N 24F: 100N
Min. Bend Radius	
BIF:	10mm
Temperature Range	
Storage:	-40 °C to 70 °C
Operation:	-20 °C to 70 °C

